

IMPORTANT SAFEGUARDS

INSTALLATION INSTRUCTIONS

When using electrical equipment, basic safety precautions should always be followed including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTION

1. To reduce the risk of electrical shock, turn off power supply before installation or servicing.
2. Product must be installed in accordance with NEC or your local electrical code. If you are not familiar with these codes and requirements, consult a qualified electrician.


SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

NOTES: The LED Fixture and the Pendant Mounting Kit are packaged separately. Note that the pendant kit contains the following parts:

- | | |
|-------------------------------|-----------------------|
| (2) - Painted Lock-Nut Washer | (1) - Lock-Nut Washer |
| (1) - Pendant Stem | (1) - Offset Bracket |
| (1) - Collar | (2) - Mounting Screws |
| (1) - Canopy | |


TO INSTALL:

PENDANT MOUNTING INSTRUCTION

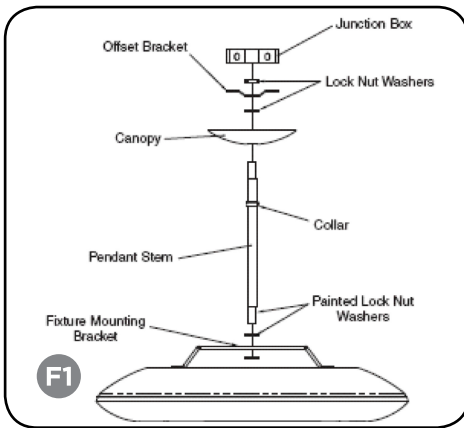


- STEP 1:**
 Attach Painted Lock-Nut Washer to the bottom of the Pendant Stem.
- STEP 2:**
 Feed the Fixture Cord through the second Painted Lock-Nut Washer, the Fixture Mounting Bracket, and the Pendant Stem.
- STEP 3:**
 Attach the Pendant Stem to the Fixture Mounting Bracket by holding the Painted Lock-Nut Washer (from Step 2) in place under the Fixture Mounting Bracket and tightening stem until secure.
- STEP 4:**
 Slip the Collar and the Canopy over the Fixture Cord and the Pendant Stem.
- STEP 5:**
 Attach the Offset Bracket to the Pendant Stem using the two remaining Lock-Nuts Washers.
- STEP 6:**
 Mount the Pendant Stem assembly to j-box (supplied by others) with included Mounting Screws, and make supply connections per **“Electrical Connections.”**
- STEP 7:**
 Slide Canopy and Collar flush with ceiling and tighten Collar screw.

HOOK AND CORD MOUNTING INSTRUCTION

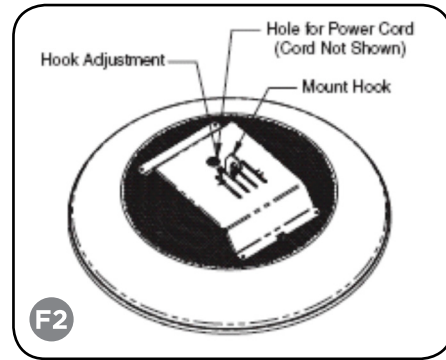

- STEP 1:**
 Push down on retainer spring until top of spring is free of fixture hook.
- STEP 2:**
 Slide hook into securely mounted eye hanger and return retainer spring to original position.
 NOTE: The fixture should already be factory set for correct balance. However, should you need to, the fixture may be balanced by loosening the hook adjustment set screw **(Figure 2)** on the top of the housing and sliding the hook as necessary for correct balance. Tighten hook set screw when finished.
- STEP 3:**
 Strain relief is required for electrical connections. Install a suitable Listed cord strain relief bushing in the junction box and feed the fixtures supply cord through it or tie an overhand knot in the cord in the junction box.
- STEP 4:**
 Make supply connections per **“Electrical Connections”**.

ELECTRICAL CONNECTIONS

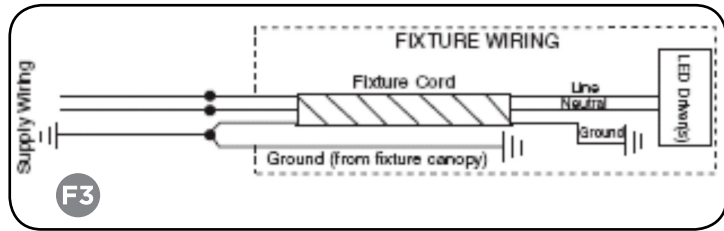

STEP 1:

Connect supply ground wire to ground wire from Fixture Canopy and the ground wire from the Fixture Cord using supplied wire nut.

STEP 2:

Connect supply line conductor to black wire from Fixture Cord using supplied wire nut.

STEP 3:

Connect supply neutral conductor to white wire from Fixture Cord using supplied wire nut.

The information in this document is subject to change without notice.
Visit website for patents that cover these products: Patent <http://www.cree.com/patents>



Visit website for warranties that cover Cree® BetaLED® Technology products:
Warranties <http://www.cree.com/lighting/products/warranty>

