

DSXF1 Floodlight

D-Series LED Floodlight, Size 1

Versatility, Superior Performance, and Energy Savings in a Compact Size

Incredible output and compact size, the D-Series LED Floodlight, Size 1, now offering up to 5,600 lumens, can be effortlessly concealed providing a versatile floodlight for use in a large breadth of application types. With its advanced LED technology and an array of optical distributions, the DSXF1 delivers superior optical performance and energy efficiency for architectural, landscape, and sign lighting applications.

Versatile and Superior Optical Performance:

- The DSXF1 delivers up to 5,600 lumens with two-performance packages allowing one size luminaire for multiple application types.
- Using the latest LED technology, the DSXF1 has the right amount of light needed to replace 70W to 150W metal halide.
- Seven proprietary-precision optics deliver exceptional uniformity and even illumination required for a wide-variety of applications.

Energy and Maintenance Savings:

- 20+ years expected service life means reduced maintenance costs, eliminating ten expensive lamp changes.
- 133 LPW allows for energy savings of 77% vs. comparable 150W metal halide luminaires; saving up to \$70 a year, per luminaire.

DLC

The DSXF1 is DesignLights Consortium® qualified, which makes them eligible for utility rebate opportunities and can help improve project ROI.



Quick Facts:

- 70W to 150W MH replacement
- Performance packages from 2,300 to 5,600 lumens
- Input watts from 21W-42W
- Seven optics covering narrow spot to wide flood distribution
- Available in 3000K, 4000K & 5000K CCT
- Lumen Maintenance L95/100,000 Hrs
- Weight: 7.2 lbs; EPA: 0.60 ft²

D-Series LED Flood Luminaire - Size 1

Ordering Information

EXAMPLE: DSXF1 LED P2 40K MSP MVOLT THK DDBXD

DSXF1 LED								
Series	Performance Package	Color Temperature	Distribution	Voltage	Mounting	Options	Finish (required)	
DSXF1 LED	P1 P2	30K 3000K 40K 4000K 50K 5000K	NSP Narrow spot MSP Medium spot MFL Medium flood FL Flood WFL Wide flood WFR Wide flood, rectangular HMF Horizontal flood	MVOLT 120 208 240 277 347	Shipped included THK Knuckle with 1/2" NPS threaded pipe IS Integral slipfitter (fits 2-3/8" O.D. tenon) YKC62 Yoke with 16-3 SO cord Shipped separately DSXF1/2TS Tenon slipfitter (2-3/8" O.D. THK required) FTS CG6 Tenon Slipfitter (fits 2-3/8" to 2-7/8" O.D. tenon. YKC62 required)	Shipped installed PE Photocontrol, button style PEX Photocontrol external threaded adjustable SF Single fuse (120, 277, 347V) DF Double fuse (208, 240) DMG 0-10V dimming driver (no controls) Shipped separately UBV Upper/bottom visor (universal) FV Full visor VG Vandal guard	DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White	

Accessories


Ordered and shipped separately.

DSXF1/2TS DDBXD U	Slipfitter for 1-1/4" to 2-3/8" O.D. tenons; mates with 1/2" threaded knuckle (specify finish)
FRWB DDBXD U	Radius wall bracket, 2-3/8" O.D. tenon (specify finish)
FSPB DDBXD U	Steel square pole bracket, 2-3/8" O.D. tenon (specify finish)
DSXF1UBV DDBXD U	Upper/bottom visor accessory (specify finish)
DSXF1FV DDBXD U	Full visor accessory (specify finish)
DSXF1VG U	Vandal guard accessory

For more mounting options, visit our [Floodlighting Accessories](#) pages.

Please use the spec sheet at www.acuitybrands.com when ordering to ensure component compatibility for your desired configuration.

Optic Options

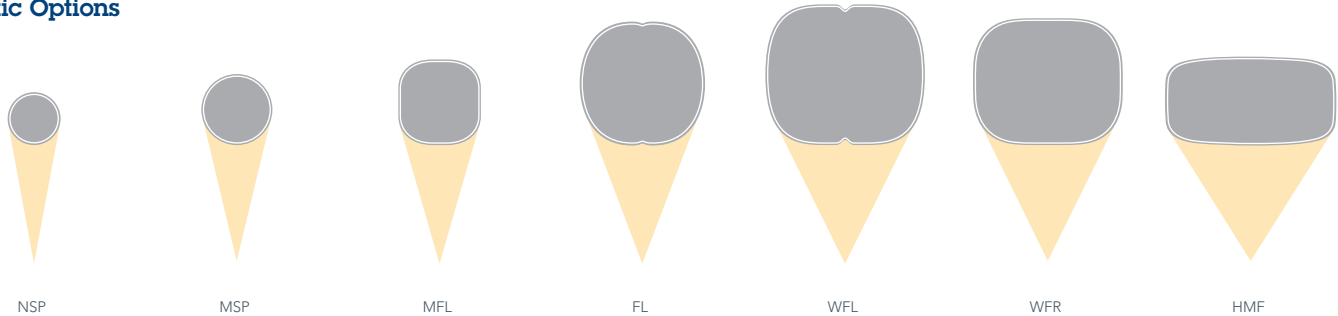

LED Floodlighting Solutions



MODEL #	OFL 1	OFL 2	DSXF1	DSXF2	DSXF3	HLF1	HLF2
Lumens	2,000-3,900	10,000-14,900	2,300-5,600	6,700-12,600	12,770-18,990	16,000-32,600	31,100-64,550
Metal Halide Replacement	70W-150W	250W-400W	70W-150W	150W-250W	250W-400W	400W+	1000W+
Input Watts	23W/49W	121W/183W	21W/42W	54W/74W/102W	129W/183W	166W/246W/295W	328W/487W/598W
LPW	81-91	79-85	106-147	107-145	99-117	85-119	83-121
DesignLights Consortium® qualified product	✓	✓	✓	✓	✓	✓	✓



DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

Learn more about our LED floodlighting solutions at www.lithonia.com

Visit www.lithonia.com for more information