

PROJECT:  TYPE:

LOCATION:  CAT:



**Description**

The Flange Slot is designed to be used in drywall and other flat surfaces during remodeling or new construction. 3/8" flanged edges on either side nearly disappear for a clean line-of-light look.

**Features**

- Extruded aluminum construction
- Use tape light, lens, spring clips, and end caps to create a complete fixture (tape light and accessories sold separately)

**Mounting**

Recess mount via spring mounting clips

**Applications**



Lines of light across walls, ceilings, and other flat surfaces

**Warranty**

3 years

## Technical Information

Profile Dimensions

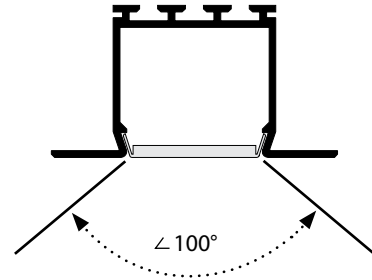

## Ordering Information

**Flange Slot Extrusion**




MODEL	TYPE	LENGTH
PE	DFSLOT	2M

**PE-DFSLOT-2M includes:**

(1) 2M Flange Slot extrusion

\*Standard Flange Slot Channel is available as special order only  
Please allow up to 2 weeks for order processing.

## Accessories

Image	Part Number	Description
	PE-SLOTLENS-2M	2 meter frosted polycarbonate lens for Flange Slot extrusion; UV Resistant/Flame Retardant
	PE-DFSLOT-END	Polypropylene plastic end cap for Flange Slot extrusion
	PE-DFSLOT-CLIP	Spring mounting clips for Flange Slot extrusion