

## 2 ft. x 2 ft. 3500K, 40W LED Edge Lit Flat Panel


- 2 ft. x 2 ft. size - easily fits into standard T-bar grid ceilings
- High efficacy - 100 lm/W
- High efficiency, dimmable driver (0-10V)
- Uniform, glare-free light evenly distributed over entire panel
- Lightweight and ultra-thin (less than 2 in. thick) - easily replace existing fixtures
- Surface mount kit available (sold separately)
- High quality construction with smooth welds. Impact resistant, easy to clean
- Durable and attractive white powder-coat finish
- WAGO connectors included for simple daisy chain wiring
- 3500K - Neutral White
- 120-277V input voltage
- 50,000 hour rated lifetime
- 5-year limited warranty




Specifications	
Model	PN22-W40-C35
Part Number	99902
Color Temperature	3500K
Lumen Output	4000lm
Wattage	40W
Power Factor	0.9
CRI	80
Efficacy	100lm/W
Dimmable	0-10V
Voltage	120-277V
Operating Temperature	-20°C to +40°C
Weight	132.32 oz.
Dimensions	23.60 x 0.49 x 23.60 in
Rated Lifetime	50,000 Hours
Warranty	5-Year Limited Warranty

# 2 ft. x 2 ft. 3500K, 40W LED Edge Lit Flat Panel

## Diagrams:

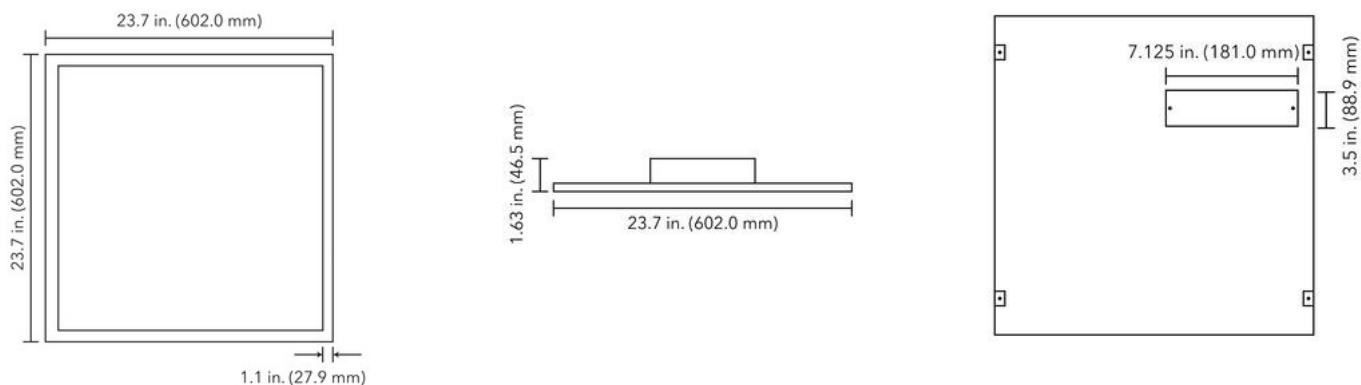

## Available accessories:

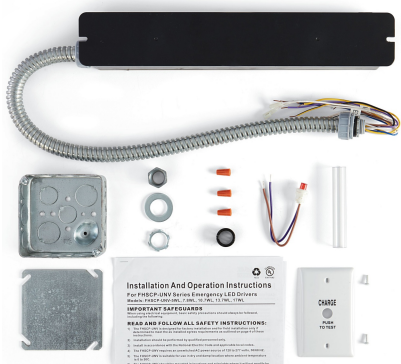

EM Kit - Converts standard Verbatim panel to Emergency Backup (99956)

Surface Mount Kit 2' x 2' (99271)