

2 ft. x 2 ft. 4000K, 25W LED Edge Lit Flat Panel

- 2 ft. x 2 ft. size – easily fits into standard T-bar grid ceilings
- High efficacy 125 lm/W – certified DLC Premium
- High efficiency, dimmable driver (0-10V)
- Uniform, glare-free light evenly distributed over entire panel
- Lightweight and ultra-thin – easily replace existing fixtures
- Surface mount kit available (sold separately)
- High quality construction with smooth welds. Impact resistant, easy to clean
- Durable and attractive white powder-coat finish
- 4000K - Cool White
- 100-277V input voltage
- 50,000 hour rated lifetime
- 5-year limited warranty





Specifications	
Model	PN22-W25-C40-P
Part Number	99911
Color Temperature	4000K
Lumen Output	3250lm
Wattage	25W
Power Factor	0.9
CRI	80
Efficacy	125lm/W
Dimmable	0-10V
Voltage	100-277V
Operating Temperature	-20°C to 40°C
Dimensions	23.60 x 0.50 x 23.60 in
Rated Lifetime	50,000 Hours
Warranty	5-Year Limited
DLC Product Listing	PN22-W25-C40-P

Certifications:



2 ft. x 2 ft. 4000K, 25W LED Edge Lit Flat Panel

Diagrams:

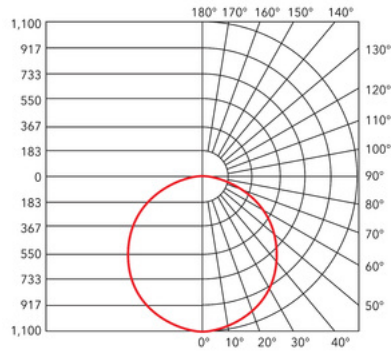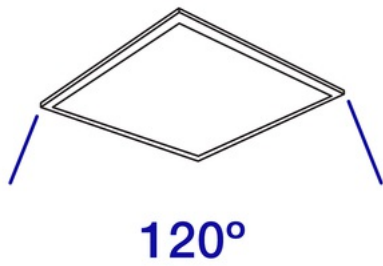

Available accessories:



EM Kit - Converts standard Verbatim panel to Emergency Backup (99956)

Surface Mount Kit 2' x 2' (99271)