



Replace cluster and 3U-pin base compact fluorescent lamps.

Color: White

Weight: 0.3 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

## Driver Info

Watts 9W  
Color Temp 5000K (Daylight)  
Lumens 1,000  
Efficacy 111.1 LPW  
Color Accuracy 82 CRI  
L70 Accuracy 50,000

## LED Info

Input Voltage 120-277V  
Power Factor 0.9  
Flicker N/A  
THDi <20%  
R9

## Technical Specifications

### Listings

#### UL Recognized:

Yes

#### UL Classified:

Yes

#### FCC:

Yes

#### Rohs:

Yes

#### CEC Status:

Lawful for sale in California

### Description

#### Lamp Type:

PLC/T Compacts

#### Bulb Type:

PLC/T

#### Base Type:

G24d, 2 Pin

#### Orientation:

Vertical

#### Material:

Glass

### LED Characteristics

#### Installation Type:

Type B

#### Lifespan:

50,000-hour LED lifespan based on IES LM-70 results

### Construction

#### Operating Temperature:

-20 - 40°C

#### MOL (inches):

4.69"

#### MOD (inches):

1.85"

### Technical Specifications

#### Dimmable:

No

### Other

#### Warranty:

5-years

### Shipping Information

#### Case Qty:

12

#### Case Dimensions:

8.07 x 6.1 x 5.12

## Technical Specifications (continued)

### Shipping Information


**Pallet Quantity of Pieces:**

2880

### Pallet Dimensions:

47.24 x 39.37 x 47.64

## Dimensions

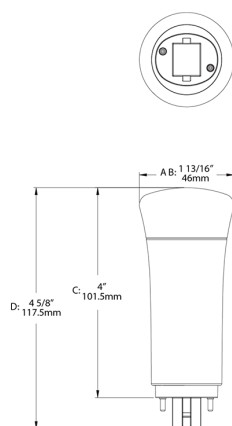

## Features

Replacement for Conventional Fluorescent Lamps

Approximately 40% More Energy Efficient than Conventional Pin-Base CLF's with G24q base

Instant on, no flicker or hum

Bypass ballast to eliminate maintenance costs or use existing ballast

111+ Lumens per watt

Environmentally friendly: No Mercury Used

## Ordering Matrix

Family	Lamp Power	Orientation	CRI/Color Temp	Installation Type
PLC	9	V	850	BYP
	9 = 26W	H = Horizontal V = Vertical	830 = 3000K 835 = 3500K 840 = 4000K 850 = 5000K	BYP = Ballast Bypass