



Replace cluster and 3U-pin base compact fluorescent lamps.

Color: White

Weight: 0.3 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Watts 9W
 Color Temp 4000K (Cool White)
 Lumens 1,000
 Efficacy 111.1 LPW
 Color Accuracy 82 CRI
 L70 Accuracy 50,000

LED Info

Input Voltage 120-277V
 Power Factor 0.9
 Flicker N/A
 THDi <20%
 R9

Technical Specifications

Listings

UL Recognized:

Yes

UL Classified:

Yes

FCC:

Yes

Rohs:

Yes

CEC Status:

Lawful for sale in California

Description

Lamp Type:

PLC/T Compacts

Bulb Type:

PLC/T

Base Type:

G24d, 2 Pin

Orientation:

Vertical

Material:

Glass

LED Characteristics

Installation Type:

Type B

Lifespan:

50,000-hour LED lifespan based on IES LM-70 results

Construction

Operating Temperature:

-20 - 40°C

MOL (inches):

4.69"

MOD (inches):

1.85"

Technical Specifications

Dimmable:

No

Other

Warranty:

5-years

Shipping Information

Case Qty:

12

Case Dimensions:

8.07 x 6.1 x 5.12

Technical Specifications (continued)


Shipping Information

Pallet Quantity of Pieces:
2880

Pallet Dimensions:

47.24 x 39.37 x 47.64

Dimensions

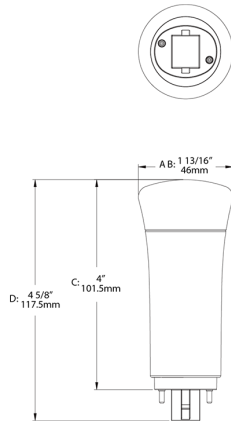

Features

- Replacement for Conventional Fluorescent Lamps
- Approximately 40% More Energy Efficient than Conventional Pin-Base CLF's with G24q base
- Instant on, no flicker or hum
- Bypass ballast to eliminate maintenance costs or use existing ballast
- 111+ Lumens per watt
- Environmentally friendly: No Mercury Used

Ordering Matrix

Family	Lamp Power	Orientation	CRI/Color Temp	Installation Type
PLC	9	V	840	BYP
	9 = 26W	H = Horizontal V = Vertical	830 = 3000K 835 = 3500K 840 = 4000K 850 = 5000K	BYP = Ballast Bypass