



Replace cluster and 3U-pin base compact fluorescent lamps.

Color: White

Weight: 0.3 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Watts	9W	Input Voltage	120-277V
Color Temp	3000K (Warm White)	Power Factor	0.9
Lumens	950	Flicker	N/A
Efficacy	105.6 LPW	THDi	<20%
Color Accuracy	82 CRI	R9	
L70 Accuracy	50,000		

## Technical Specifications

### Listings

**UL Recognized:**

Yes

**UL Classified:**

Yes

**FCC:**

Yes

**Rohs:**

Yes

**CEC Status:**

Lawful for sale in California

### Description

**Lamp Type:**

PLC/T Compacts

**Bulb Type:**

PLC/T

**Base Type:**

G24d, 2 Pin

**Orientation:**

Horizontal

**Material:**

Glass

### LED Characteristics

**Installation Type:**

Type B

**Lifespan:**

50,000-hour LED lifespan based on IES LM-70 results

### Construction

**Operating Temperature:**

-20 - 40°C

**MOL (inches):**

6.65"

**MOD (inches):**

1.1"

### Technical Specifications

**Dimmable:**

No

### Other

**Warranty:**

5-years

### Shipping Information

**Case Qty:**

12

**Case Dimensions:**

6.5 x 4.92 x 7.09

## Technical Specifications (continued)


### Shipping Information

**Pallet Quantity of Pieces:**  
3384

### Pallet Dimensions:

47.24 x 39.37 x 49.61

## Dimensions

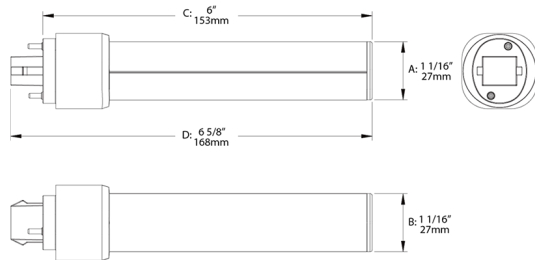

## Features

Replacement for Conventional Fluorescent Lamps

Approximately 40% More Energy Efficient than Conventional Pin-Base CLF's with G24q base

Instant on, no flicker or hum

Bypass ballast to eliminate maintenance costs or use existing ballast

111+ Lumens per watt

Environmentally friendly: No Mercury Used

## Ordering Matrix

Family	Lamp Power	Orientation	CRI/Color Temp	Installation Type
PLC	9	H	830	BYP
	9 = 26W	H = Horizontal V = Vertical	830 = 3000K 835 = 3500K 840 = 4000K 850 = 5000K	BYP = Ballast Bypass