

Compact Thermoplastic Exit Sign



Illumination

- Ultra bright, energy efficient, long life Red or Green LEDs.

Electrical

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V Long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Sample Ordering Information

HL0301B2RW

Battery Backup
Double Face
Red Letters
White Housing

Project:	
Catalog#:	
Approved by:	

Mounting

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.


Housing

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic.
- Aesthetically pleasing, curved face, rounded corner design.
- EZ snap-out Chevron directional indicators.

Warranty & Listings

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

Dimensions

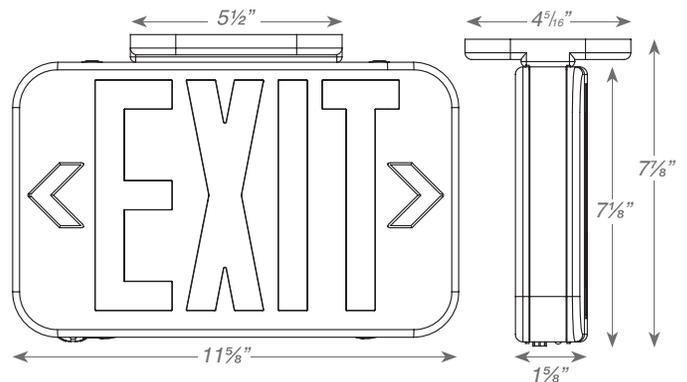

Ordering Information

Model	Operation	Number of Faces	Letter Color	Housing Color
HL0301	Blank: AC Only B: Battery Backup	2: Double Face	R: Red G: Green	W: White