

MDF021

Wall Sconce



Features

Housing

Die-formed Cold-rolled Steel

Optical

Shade: High Transmission Glass Creates Excellent Light Distribution and Uniformity

LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light

Electrical

High Power Factor, Low THD

Lamp

Integrate LED Module with High CRI

LED Type: 3000K LED (More Color Temperature Option 3500K, 4000K, 5000K)

GU24 Type: - CFL Bulb, 2700K or 4000K


- 9W LED Bulb, 3000K or 4000K

Certification

UL/cUL, ETL/cETL Listed, Suitable for Damp Locations

Warranty

5 Years Limited Warranty on Driver and LED

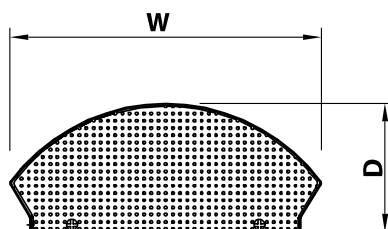

LED Type

Model	Input Voltage	Input Wattage	LED CT	CRI	Lumen (TYP)	Finish/Shade	Dimension (W x H X D)	Energy Star
MDF021D-xxxxK	120V	15W	3000K	>80	1130	ORB / Frosted Glass	8.5" x 10.3" x 3.7"	Yes

GU24 Type

Model	Input Voltage	Lamp	Finish	Shade	Dimension (W x H X D)	Energy Star
MDF021PG-213	120V	2 x 13W GU24	ORB	Frosted Glass	8.5" x 10.3" x 3.7"	