

## AC Direct T8 LED - Coated Integral Driver



### FEATURES

- Integral Driver, Bypasses ballast
- Universal input voltage 120-277VAC
- Double ended input
  - Reduces installation costs
  - Shunted or Non-shunted
- 4' 1800 & 2200 lumen options
- High Efficiency operation, up to 150 lm/W
  - Standard and Premium options
- Long Life: 50,000 hours L70
- Glass construction for optimum optical efficiency
- PET Coated Construction
- Full light output down to -4°F
- RoHS Compliant - Mercury Free
- No UV Emissions
- 5 Year limited lamp warranty
- UL Classified 1598C for US and Canada
- NSF Listed
- DesignLights Consortium® qualified on select models. Consult [www.designlights.org/QPL](http://www.designlights.org/QPL) for details

## ORDERING GUIDE


Model Number	Ordering Code	Length	Lumens	Power (W)	Efficacy (lm/W)	CCT	Pkg Qty	UPC Code
T8LACD4F14/840BC	T8LACD4F14/840BC25EC	48"	1800	14	129	4000	25	768386694984
T8LACD4F14/850BC	T8LACD4F14/850BC25EC	48"	1800	14	129	5000	25	768386694991
T8LACD4F17/840BC	T8LACD4F17/840BC25EC	48"	2200	17	129	4000	25	768386695011
T8LACD4F17/850BC	T8LACD4F17/850BC25EC	48"	2200	17	129	5000	25	768386695028
T8LACD4F18/840BC	T8LACD4F18/840BC25EC	48"	2600	18.5	141	4000	25	768386703686
T8LACD4F18/850BC	T8LACD4F18/850BC25EC	48"	2600	18.5	141	5000	25	768386703693

## ADDITIONAL SPECIFICATIONS

Lamp Type:	Linear T8
Base:	Medium Bi-Pin (G13)
Color Rendering Index (CRI):	82
Rated Life:	L70 @ 50000 hours

Ambient Temperature:	-4°F to 113°F
Beam Angle:	210°
EMI/RFI:	FCC Part 18 - Non-Consumer
Warranty:	5 years

## WIRING DIAGRAM

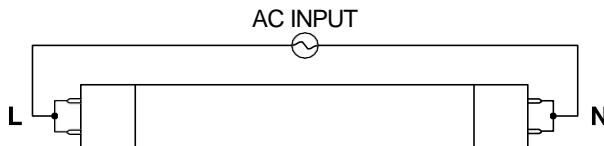


### OPERATING NOTES:


- \* Input voltage is wired so that one lamp holder is connected to Neutral and the other to Line.
- \* Shunted or Non-Shunted lamp holders may be used.



**DIMENSIONS: in (mm)**

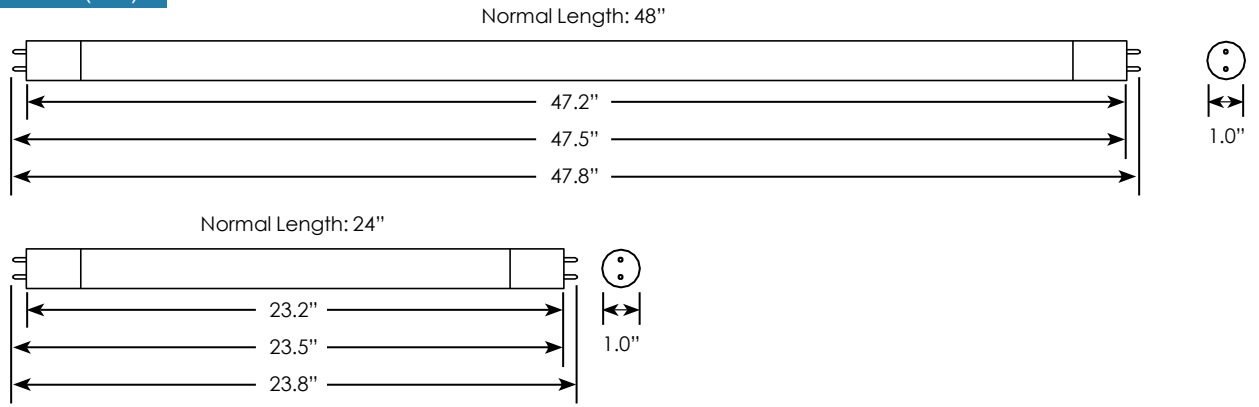

**POLAR DISTRIBUTION**

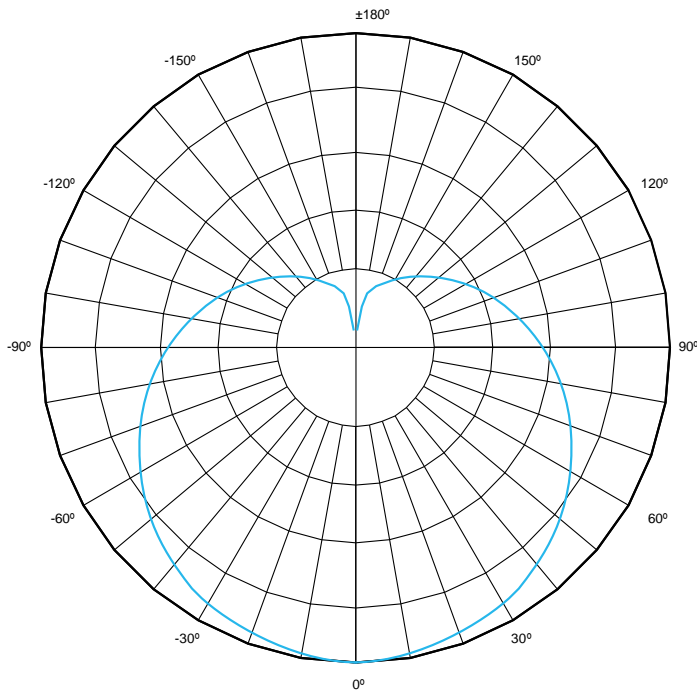

**OPERATING NOTES:**

- Suitable for use in dry and damp environments
- Must follow installation guidelines provide with the lamp shipment.
- NSF Listed for Food Zone (Non-contact), Splash Zone, and Non-food Zone.