



OUTDOOR BOLLARD C203BC

COMMERCIAL LIGHTING

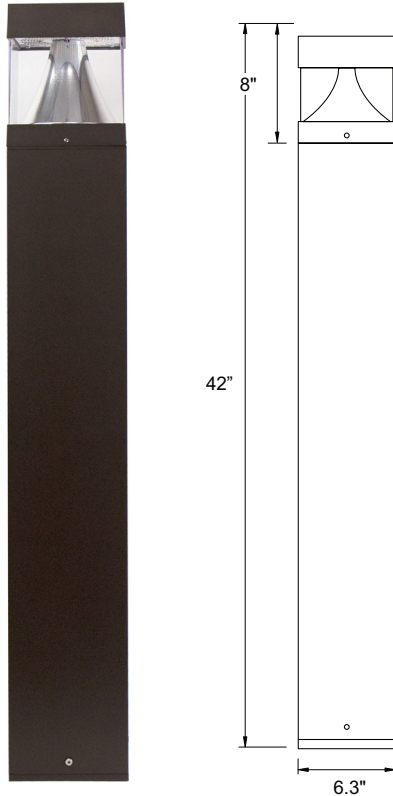


Wave Lighting's C203BC Bollard adds a modern look to any pathway. This fixture is available LED and its industrial strength features make it ETL listed and suitable for wet locations. Wave Lighting's C203BC is designed for low mounting in reinforced concrete (by others). Hardware and template are included.



Anchor Bolt M10 x 6.5"
(4 anchor bolts and template included)

TUNABLE
Color Temperature
& Lumen Output



SWITCH PANEL
ON REVERSE SIDE




SPECIFICATIONS

- Tunable CCT
- Switchable Lumen / Wattage
- Powder Coated Finish
- Aluminum Housing
- Mounting Hardware Included
- Polycarbonate Lens
- Minimum Starting Temp -20°F
- ETL Listed for Wet Locations

BK BLACK

BZ BRONZE



LED SOURCE OPTIONS

LED MULTI-VOLT SYSTEM - L22

- 120-277V, 50/60Hz
- Estimated 50,000 Hrs L₇₀
- Surge Supression
- Switchable 3K, 4K, 5K CCT 80CRI
- 0 - 10V Dimming
- 5 Year Warranty

GUIDE CODE: C203BC-L22S-BK

CALL FOR PHOTOMETRIC INFORMATION

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR
C203B	POLYCARBONATE C-Clear	120-277V MULTI-VOLT	S-Switchable 3K, 4K & 5K	BK-Black BZ-Bronze
		L22-Switchable 12W, 1600lm; 16W, 2100lm or 22W, 3000lm		