

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current, Class 2	Watts	9.5 W
120V	91A	Color Temp	2700/3000/3500/4000/5000K
208V	N/A	Color Accuracy	90 CRI
240V	N/A	L70 Lifespan	N/A
277V	N/A	Lumens	900 lm
Input Watts	9.5 W	Efficacy	94

**Technical Specifications**

**Performance**

**Product Type:**

Retrofit Downlight w/Nightlight

**Description:**

Recessed lighting retrofits with a nightlight mode to provide 2000K amber color temperature alone. Creates comfort, warmth, soft lighting and extra ambiance to help you fall asleep at night.

**Wattage Equivalency:**

60W Incandescent

**Input Wattage:**

9.5W

**Nominal Lumens:**

900lm (mainlight)  
20lm (nightlight)

**Actual Lumens:**

Mainlight:  
907lm @ 2700K;  
915lm @ 3000K;  
932lm @ 3500K;  
938lm @ 4000K;  
960lm @ 5000K

Nightlight:

20lm @ 2000K

**Efficacy:**

Mainlight:  
97lm/W @ 2700K;  
97lm/W @ 3000K;  
98lm/W @ 3500K;  
99lm/W @ 4000K;  
102lm/W @ 5000K

Nightlight:

6lm/W @ 2000K

**L70 Lifespan:**

50,000-Hour LED lifespan based on IES LM-70 results

**Electrical**

**THD:**

20%

**Power Factor:**

>0.7

**Dimmable:**

Yes, dimmable down to 10% on compatible TRIAC/ELV dimming systems. See Dimmer Compatibility List.

**Input Voltage:**

120V

**Operating Frequency:**

60 Hz

**Input Current @ 120V (mA):**

0.09mA

**Operating Temperature:**

-4°F to 104°F (-20°C to 40°C)

**Flicker:**

30%

**LED Characteristics**

**Beam Angle:**

90°

**Color Temperature:**

Mainlight:  
Field adjustable via dip switch  
2700K/3000K/3500K/4000K/5000K

Nightlight:

2000K

**Color Accuracy (CRI):**

>90 CRI

**R9 Value:**

High color performance with R9 greater than 50

**Color Consistency:**

<4-step (2700K & 5000K); <7-step (3000K/3500K/4000K) MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

## Technical Specifications (continued)

### Color Stability:

LED color temperature is warranted to shift no more than 200K in color temperature over a 5-year period

### Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

### Installation

#### Base Type:

E26 socket adapter Included

### Construction

#### Size:

6"

#### Shape:

Round

#### Finish:

White

#### Enclosure Material:

Plastic

#### Trim Style:

Smooth

#### Lens Finish:

Frosted

#### Lens:

Polycarbonate light diffuser distributes light evenly and smoothly for general lighting applications

### Compliance

#### Listings:

UL Classified, UL Recognized

#### Environment:

Suitable for use indoors and outdoors in dry, damp, or wet environments.

#### IC Rated:

No

#### Air Tight:

No

#### Energy Star Approved:

This product is ENERGY STAR® Version 2.2 Certified.

### DLC Listed:

No

### Certification Model Number:

DLR0155(ECLPS6)

### California Title 20 Compliant:

Can be used to conform with the requirements of California Title 20

### California Title 24 JA8 Compliant:

No

### California Energy Commission (CEC) Status:

Lawful for Sales in California

### NEC Compliant:

Suitable for use in closets. Compliant with NEC Sec. 410.16 (A)(1) and 410.16 (C3).

### IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

### RoHS:

Mercury and UV free. RoHS-compliant components.

### FCC:

Complies with Part 15 of the FCC Rules

### Other

#### Compatible Accessories:

[NDCANIC6R](#)

6" New construction recessed housing IC rated

[RDCANIC6R](#)

6" Remodeler recessed housing IC rated

[RFLED-RETROBAND](#)

Retrofit band with friction clips for 5"/6" downlight

### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).


### Note:

All values are typical (tolerance +/- 10%)

### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

**Dimensions**

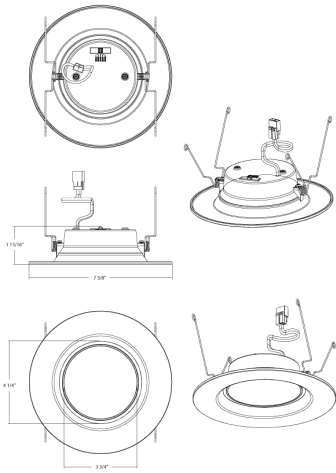

**Features**

- Smooth and baffle trim cones available in a white finish
- 5CCT field adjustable (2700/3000/3500/4000/5000K)
- 2000K amber white nightlight ring located on the inside of the trim cone
- Dimmable on TRIAC/ELV @ 120V
- 50,000 hrs, 5-year no-compromise warranty

**Ordering Matrix**

Family	Size/Wattage	Shape	CRI/Color Temp	Voltage/Dimming	Finish	Trim
ECLPS	6					
	4 = 4", 7.5W 6 = 6", 9.5W	Blank = Round	Blank = 2700K/3000K/3500K/4000K/5000K CCT Adjustable	Blank = 120V, TRIAC/ELV	Blank = White	Blank = Smooth B = Baffle